



# TURBO LIQUIDISER TRX-22 400/50/3N

2-speed turbo-mixer.

P/N 3030506



DYNAMIC PREPARATION  
TURBO LIQUIDISERS



## SALES DESCRIPTION

- ✓ Turbo-blender designed to work in up to 800 l / 130 gal bowls.

### Ideal for big production needs

- ✓ Designed for large yields and for frequent use and cleaning.
- ✓ Mix and liquefy directly in the pot or pan for making consommés, soups, omelettes, mayonnaise, etc.
- ✓ Ideal for kitchens with large production capacities and for food industry.
- ✓ 2-speed model.

### Sturdy construction

- ✓ Fully manufactured in 18/10 stainless steel.
- ✓ Designed for large yields.
- ✓ Allow working in containers of up to 800 l / 130 gal.
- ✓ 24" long arm for blending in any type of cooking pot.
- ✓ 0-60 min built-in timer.

### Easy and convenient handling

- ✓ They can be moved in several directions and are height-adjustable.
- ✓ The machine is fitted on a trolley with 4 non-slip rubber wheels, 2 of them with brakes.
- ✓ The balanced liquidiser arm stops the arm when falling or tipping back when not locked.
- ✓ An arm securing lever, located on the trolley, allows you to lock the blender with one hand while holding the trolley with the other.
- ✓ The watertight, tilted control panel is easily accessible even during use.
- ✓ Their built-in timer allows leaving the machine running for up to 60 minutes without the need for user involvement.

### Versatility, thanks to 3 types of interchangeable grids

- ✓ 21D attachment for fibrous ingredients.
- ✓ Standard 30D multi-use attachment.
- ✓ 42D attachment for very fine blending.

### Guaranteed safety

- ✓ The safety micro switch controls work position and prevents the turbine from working if the arm is too high or low.
- ✓ The wiring incorporated into the trolley tubes, so the work area is free of cables and does not hinder the movement of the blender arm.
- ✓ Supports for storing the power supply cable prevent it from getting caught or tangled during storage.

### INCLUDES

- ✓ Trolley, motor and arm (without attachments).

### OPTIONAL

<input type="checkbox"/> Attachments:	for general use
<input type="checkbox"/> · 21D for fibrous ingredients	<input type="checkbox"/> · 42D attachment for very fine blending
<input type="checkbox"/> · Standard 30D attachment	

### ACCESSORIES

- Grids for TRX

### SPECIFICATIONS

Maximum recipient capacity: 800 l

Liquidising arm length: 600 mm  
Max. grid diameter: 288 mm

Total loading: 2200 W

Speed (in liquid): 750-1500 rpm

Electrical supply: [v:alim\_elec\_v\_min] - [v:alim\_elec\_v\_max] / 50 Hz / 3N~ (5 A - 4,2 A)

Plug: [v:enchufe]

Electrical connection: 3P+N+G

### External dimensions (W x D x H)

- ✓ Width: 568 mm
- ✓ Depth: 1643 mm (963 mm)
- ✓ Height: 1219 mm (1651 mm)

Net weight: 96 kg

Noise level (1m.): <70 dB(A)

Background noise: 32 dB(A)

Crated dimensions

1030 x 710 x 1840 mm

Gross weight: 152 kg






# TURBO LIQUIDISER TRX-22 400/50/3N

2-speed turbo-mixer.



P/N 3030506

DYNAMIC PREPARATION  
TURBO LIQUIDISERS

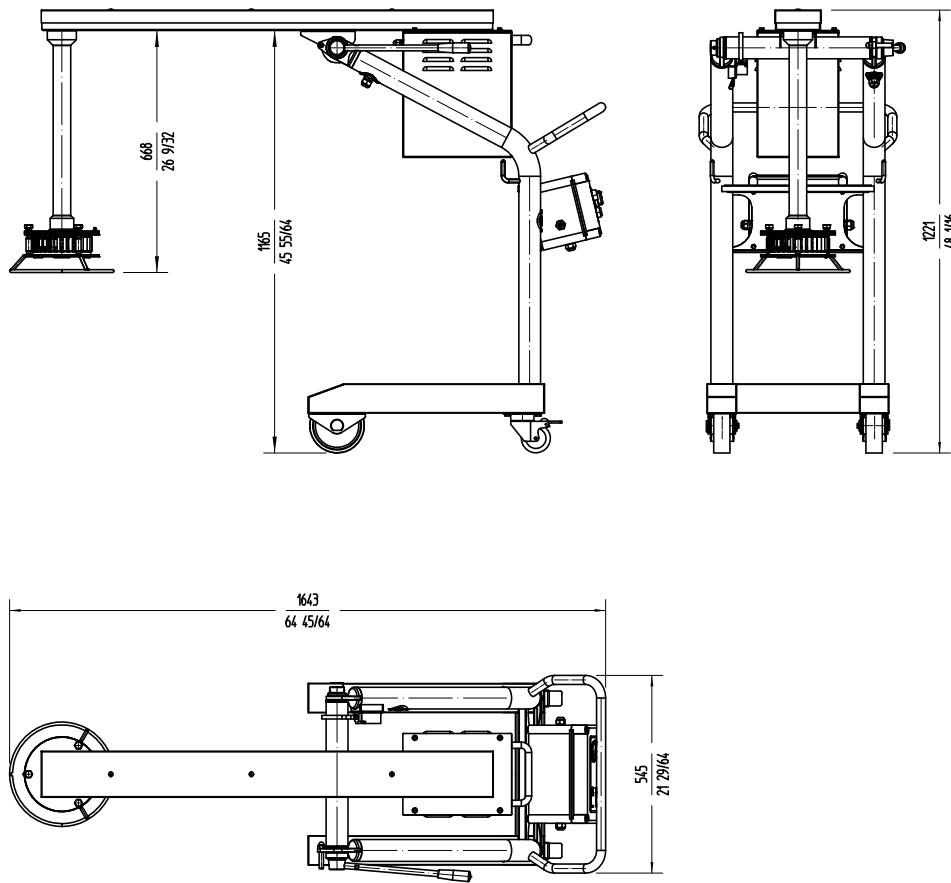

**Sammic** | [sammic.com](http://sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36  
20720 Azkoitia, Spain [sales@sammic.com](mailto:sales@sammic.com)



Project	Date
Item	Qty
Approved	

product sheet  
updated 10/03/2025