



DISHWASHER UX-120SBC 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 430 mm. Double-skinned hood.

P/N 1303401



WARE WASHING
PASS-THROUGH DISHWASHERS

product sheet
updated 20/01/2024

Designed to last

- ✓ “Flow” opening mechanism: allows the hood to be raised with less effort
- ✓ High load capacity 44 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

Premium warewashing

- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

✓ Rinse aid pump.	✓ 1 cutlery basket.
✓ Detergent Dispenser	✓ Drainage pump with level sensor. Proactive tank water renewal.
✓ 1 glasses basket.	
✓ 1 mixed basket (plates).	

OPTIONAL

- .

ACCESSORIES

<input type="checkbox"/> Tables for pass-through dishwashers	sorting table
<input type="checkbox"/> Manual water softeners	<input type="checkbox"/> Prewashing tables for pass-through and rack conveyor dishwashers
<input type="checkbox"/> Automatic water softeners	<input type="checkbox"/> Connecting tables for pass-through dishwashers and rack conveyors
<input type="checkbox"/> 500 x 500 mm baskets	<input type="checkbox"/> Reverse osmosis devices OS-140
<input type="checkbox"/> Inserts & supplements	
<input type="checkbox"/> Central sorting tables	
<input type="checkbox"/> Double connection central	

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Useful height: 430 mm

Cycles: 6
Cycle duration: 60/90/100/150/210"
Production baskets / hour: 60/40/36/24/17

Boiler capacity: 12 l
Wash tank capacity: 25 l

Consumption and savings

- ✓ Water consumption/cycle: 2.8 l
- ✓ Automatic saving mode in: 25'
- ✓ Automatic switch-off: 120'

Loading

SALES DESCRIPTION

Sani-Control: guaranteed disinfection.
Double-walled hood: insulation and energy efficiency.
Exclusive Hydroblade™ washing arms: maximum effectiveness.
3-stage filtering system.

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

Double-Walled (Ultra ISO)

- ✓ Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.





DISHWASHER UX-120SBC 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 430 mm. Double-skinned hood.



P/N 1303401

Pump: 1000 W / 1.3 Hp

Tank: 2500 W

Boiler: 9000 W

Total loading: 10000 W

Electrical supply: 400 V / 50 Hz / 3N~ (16 A)

✓ Height: 2000 mm / 1520 mm

Net weight: 135 kg

Rinse temperature: 87°C

Net weight: 135 kg

Noise level (1m.): <70 dB(A)

External dimensions (W x D x H)

✓ Width: 650 mm (Wide with handle: 725 mm)


✓ Depth: 755 mm (Bottom with handle: 835 mm)

Crated dimensions

760 x 860 x 1530 mm

Gross weight: 146 kg

WARE WASHING
PASS-THROUGH DISHWASHERS

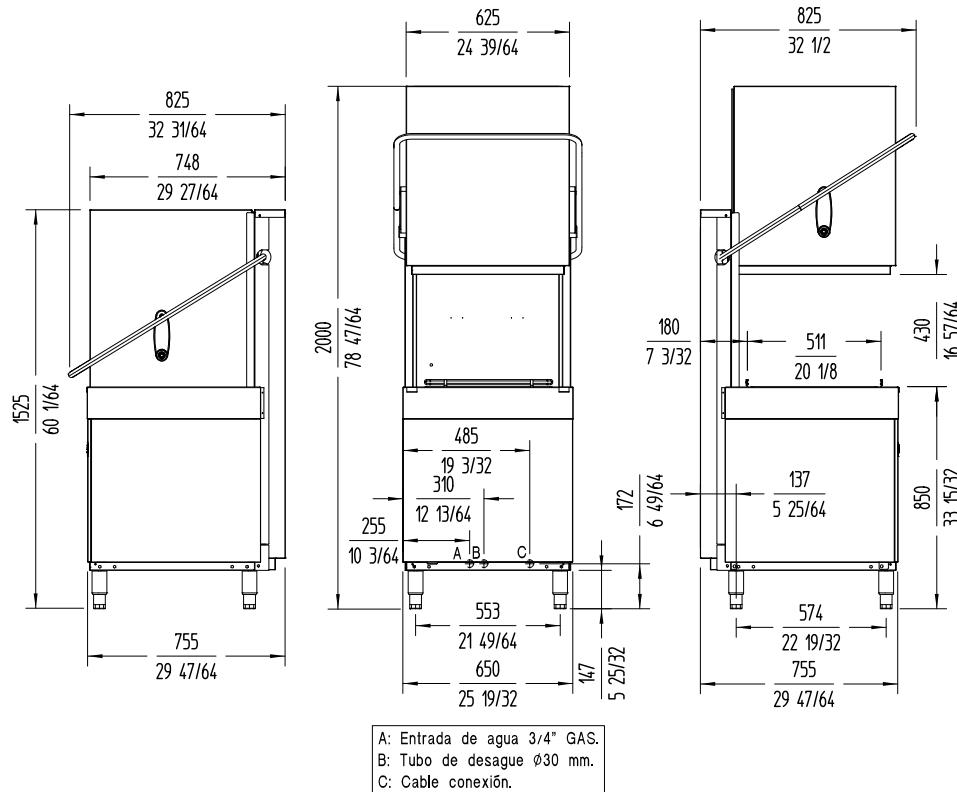

sammic | www.sammic.com
Food Service Equipment Manufacturer

Polígono Basarte, 1.
20720 Azkoitia, Spain

phone +34 943 15 72 36
sales@sammic.com



Project

Date

Item Qty

Approved

product sheet
updated 20/01/2024