



# DISHWASHER UX-120SBCV 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 430 mm. Double-skinned hood.



P/N 1303416



WARE WASHING  
PASS-THROUGH DISHWASHERS

## SALES DESCRIPTION

Sani-Control: guaranteed disinfection  
 Double-walled hood: insulation and energy efficiency  
 Exclusive Hydroblade™ washing arms: maximum effectiveness.  
 3-stage filtering system.  
 Steam condenser: environmental improvement and energy efficiency.

### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disinfection.
- ✓ The PRESSURE PUMP guarantees effective high-pressure rinsing
- ✓ WRAS certified.

### Steam condenser

- ✓ Reduces the steam released into the installation by 75%.
- ✓ Factory-integrated condenser module, no installation required.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).

### Double-Walled (Ultra ISO)

- ✓ Double-Walled Structure: thermo-acoustic insulation to attenuate the sound level and improve energy efficiency

### Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The "monoblock" design delivers durability and resistance to impacts.



- ✓ 30% savings in water consumption during rinsing compared to the previous range.

### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.

### Designed to last

- ✓ "Flow" opening mechanism: allows the hood to be raised with less effort
- ✓ High load capacity 44 cm: suitable for GN 1/1 and Euronorm
- ✓ Stainless steel surface filters for greater stability and resistance during intensive use

### Premium warewashing

- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

### INCLUDES

- ✓ Rinse aid pump.
- ✓ Detergent Dispenser
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 cutlery basket.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.

### OPTIONAL

- .

### ACCESSORIES

- Tables for pass-through dishwashers
- sorting table
- Prewashing tables for pass-through and rack conveyor dishwashers
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm baskets
- 500 x 500 mm baskets
- Inserts & supplements
- Central sorting tables
- Double connection central
- Connecting tables for pass-through dishwashers and rack conveyors
- Reverse osmosis devices OS-140

### SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Useful height: 430 mm

Cycles: 6

Cycle duration: 60/90/100/150/210"

Boiler capacity: 12 l

Wash tank capacity: 25 l

### Consumption and savings

product sheet  
updated 20/01/2024



# DISHWASHER UX-120SBCV 400/50/3N DD

Rack size 500 mm x 500 mm and door clearance 430 mm. Double-skinned hood.



P/N 1303416

- ✓ Water consumption/cycle: 2.8 l
- ✓ Automatic saving mode in: 25'
- ✓ Automatic switch-off: 120'

## Loading

Pump: 1000 W / 1.3 Hp

Tank: 2500 W

Boiler: 9000 W

Total loading: 10000 W

Electrical supply: 400 V / 50 Hz / 3N~ (16 A)

✓ Depth: 755 mm (Bottom with handle: 835 mm)

✓ Height: 2035 mm / 2035 mm

Net weight: 159 kg

Rinse temperature: 87°C

Net weight: 159 kg

Noise level (1m.): <70 dB(A)

## Crated dimensions


760 x 860 x 2050 mm

Gross weight: 170 kg

## External dimensions (W x D x H)

- ✓ Width: 650 mm (Wide with handle: 725 mm)

WARE WASHING  
PASS-THROUGH DISHWASHERS

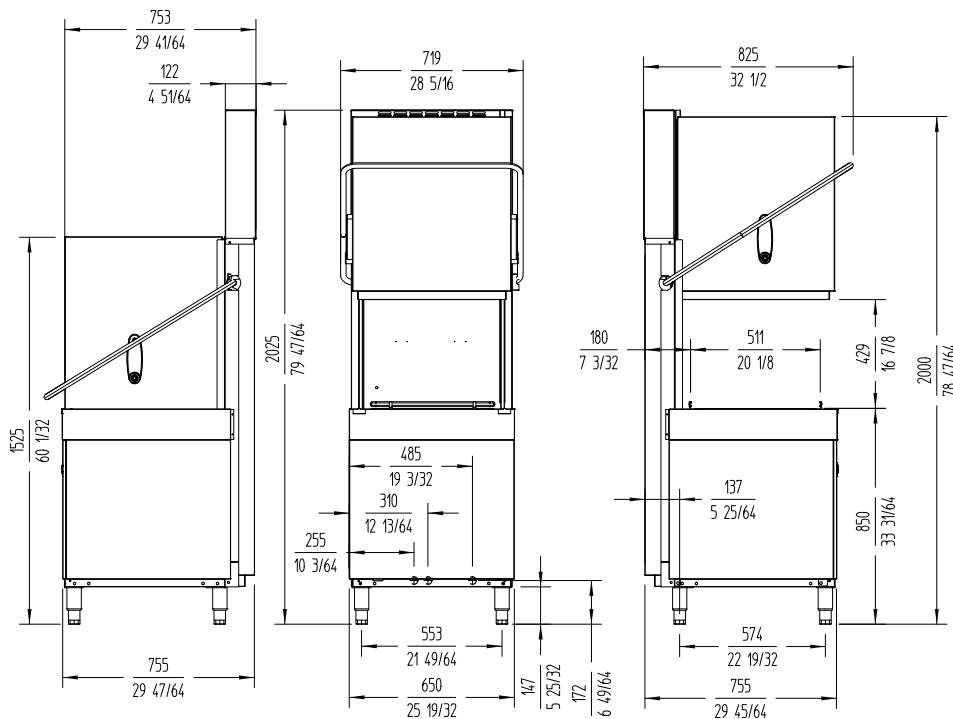

**sammic** | [www.sammic.com](http://www.sammic.com)  
Food Service Equipment Manufacturer

Polígono Basarte, 1.  
20720 Azkoitia, Spain

phone +34 943 15 72 36  
[sales@sammic.com](mailto:sales@sammic.com)



Project	Date
Item	Qty
Approved	